




The SMG1229 is a Hybrid Push Pull amplifier module. The part employs GaAs dies and is operated from 47MHz to 1218MHz with supply voltage +24V(DC). It provides excellent linearity and superior return loss performance with low noise and optimal reliability.


FEATURES

- Excellent Linearity
- Superior Return Loss Performance
- Extremely Low Distortion
- Optimal Reliability
- Low Noise
- Unconditionally Stable Under All Terminations
- Power gain @29dB
- 290mA Max. at 24VDC

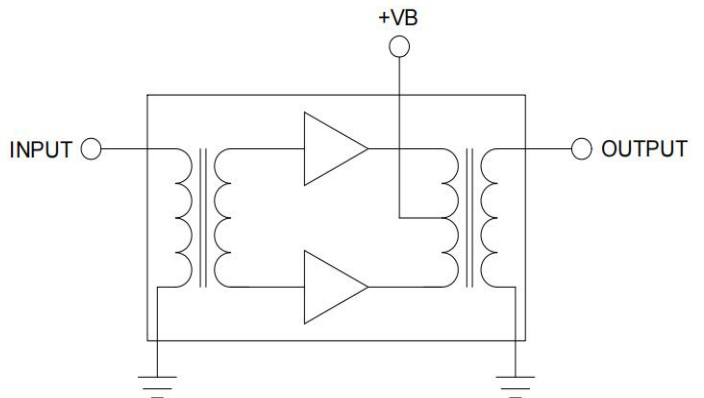

OUTLINE

PIN CONFIGURATION

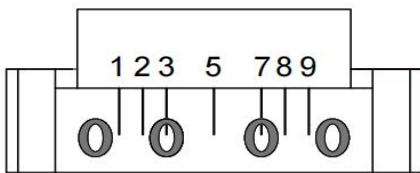

side view

Pin	Description
1	Input
5	+V _B
9	Output
2, 3, 7, 8	GND

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNITS
G _p	Power Gain	f=50 MHz	28	29.5	dB
I _{tot}	Total current consumption(DC)	V _B =24V	260	290	mA

LIMITING VALUES

In accordance with the Absolute Maximum Rating System

SYMBOL	PARAMETER	MIN	MAX	UNITS
V _i	RF input voltage	-	70	dBmV
T _{stg}	Storage temperature	-40	+100	°C
T _{mb}	Operating mounting base temperature	-30	+100	°C

CHARACTERISTICS

(Bandwidth 47 to 1218MHz ; T_{mb} = 25°C, V_B = 24V, Z_S = Z_L = 75Ω)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT	CONDITIONS
G _P	power gain	28	29	29.5	dB	f = 47MHz
G _P	power gain	-	29.5	-	dB	f = 870MHz
G _P	power gain	28.5	29.0	-	dB	f = 1218MHz
SL	slope cable equivalent	0.5	2.0	3.0	dB	f = 47 to 1218 MHz
FL	flatness of frequency response	-	-	0.8	dB	f = 47 to 1218 MHz
S ₁₁ & S ₂₂	Input & output return loss	-	-	-18	dB	f = 47 to 1000 MHz
S ₁₁ & S ₂₂	Input & output return loss	-	-	-17	dB	f = 1000 to 1218 MHz
CTB	composite triple beat	-	-68	-63	dB	V _O =43dBmV at 862MHz, flat, 98 Analog channels
CSO	composite second order distortion	-	-66	-61	dB	
XMOD	X modulation	-	-67	-	dB	
CTB	composite triple beat	-	-68	-	dB	V _O =46dBmV, 79 analog channels plus 75 digital channels (-6dB offset)
CSO	composite second order distortion	-	-75	-	dB	
XMOD	X modulation	-	-64	-	dB	
CIN		-	-65	-	dB	
F	noise figure	-	4.5	5.0	dB	f = 47 to 1218 MHz
I _{tot}	total current consumption(DC)	260	270	290	mA	V _B =+24V

The module normally operates at V_B=24 V(±0.5)

MODULE DIMENSIONS

